# HF49F/HF49FA

# **MINIATURE POWER RELAY**



File No.:E133481



File No.:R50149334



(CQC)

File No.:CQC02001001937

# Features

- 5A switching capability
- 2kV dielectric strength (between coil and contacts)
- Slim size (width 5mm, height 12.5mm)
- High sensitive: Min. 120mW
- HF49FA's size and terminals compatible with HFS8 (Output module) and HFS20 SSR
- Sockets available

COIL DATA

- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.0 x 5.0 x 12.5) mm

CONTACT DATA	
Contact arrangement	1A
Contact Resistance	100mΩ (at 1A 6VDC)
Contact material	AgSnO2, AgNi
Contact rating (Res. load)	5A 250VAC/30VDC
Max. switching voltage	250VAC /30VDC
Max. switching current	5A
Max. switching power	1250VA / 150W
Mechanical endurance	2 x 10 <sup>7</sup> ops
Electrical endurance	1 x 10 <sup>5</sup> OPS (See approval reports for more details)

1A
100mΩ (at 1A 6VDC)
AgSnO2, AgNi
5A 250VAC/30VDC
250VAC /30VDC
5A
1250VA / 150W
2 x 10 <sup>7</sup> OPS
1 x 10 <sup>5</sup> ops (See approval reports for more details)

CHARACTERISTICS			
Insulation resistance		1000MΩ (at 500VDC)	
Dielectric Between		coil & contacts	2000VAC 1min
strength	Between open contacts		1000VAC 1min
Operate time (at nomi.volt.)		10ms max.	
Release time (at nomi.volt.)		5ms max.	
Shock resistance		Functional	98m/s²
		Destructive	980m/s²
Vibration resistance		10Hz to 55Hz 1.5mm DA	
Humidity		5% to 85% RH	
Ambient temperature		-40°C to 85°C	
Termination		PCB	
Unit weight		Approx. 3g	
Construction		Plastic sealed	

Notes: 1) The data shown above are initial values.

2) Please find coil temperature curve in the characteristic curves below.

COIL	
Coil power	120mW to 180mW

COIL DATA				at 23 C	
	Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC at 85°C	Coil Resistance Ω
	5	3.50	0.25	6.0	208 x (1±10%)
	6	4.20	0.30	7.2	300 x (1±10%)
	9	6.30	0.45	10.8	675 x (1±10%)
	12	8.40	0.60	14.4	1200 x (1±10%)
	18	12.6	0.90	21.6	2700 x (1±15%)
	24	16.8	1.20	28.8	3200 x (1±15%)

Notes: 1) All above data are tested when the relays terminals are downward position. Other positions of the terminals, the pick-up and dropout voltages will have  $^{\pm}\,5\%$  tolerance. For example, when the relay terminals are transverse position, the max. pick-up voltage change is 75% of nominal voltage.

2) The max. allowable voltage in the COIL DATA is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in a very short time.


SAFETY	SAFETY APPROVAL RATINGS			
UL/CUL	Single contact	5A 30VDC L/R =0ms 5A 250VAC COSØ=1		
OL/COL	Bifurcated contact	3A 30VDC L/R =0ms 3A 250VAC COSØ=1		
TÜV		5A 250VAC COSØ=1 5A 30VDC L/R=0ms		

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2010 Rev. 1.00

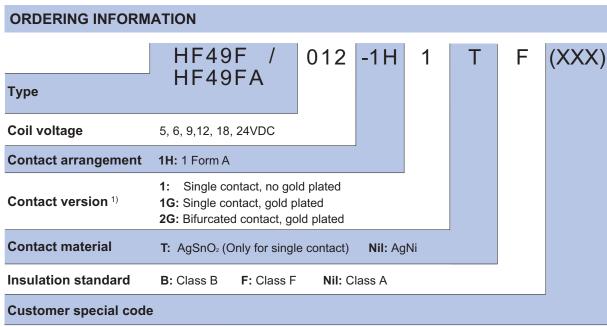


Notes: 1) The 1 type and 1G type is suitable for application such as home applicant, equipment, automatic control. 2G type is suitable for application like PLC control.


2) If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

# **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**

Unit: mm

#### **Outline Dimensions**

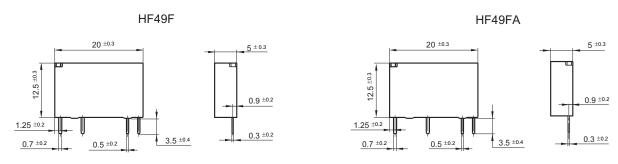

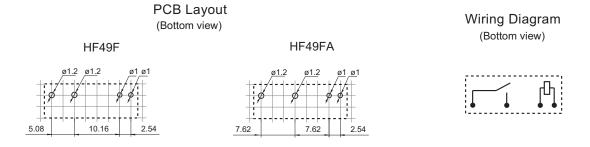


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq$ 1mm, tolerance should be  $\pm$ 0.2mm; outline dimension >1mm and  $\leq$ 5mm, tolerance should be  $\pm$ 0.3mm; outline dimension >5mm, tolerance should be  $\pm$ 0.4mm.


- 2) The tolerance without indicating for PCB layout  $\,$  is always  $\pm 0.1 mm$ .
- 3) The width of the gridding is 2.54mm.

# **CHARACTERISTIC CURVES**


## MAXIMUM SWITCHING POWER



## **ENDURANCE CURVE**



## COIL TEMPERATURE RISE



Percentage Of Nominal Coil Voltage

## Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.