## HF46F-G

### SUBMINIATURE INTERMEDIATE POWER RELAY

c **Al** us

File No.: E134517



File No.: 40025215



File No.: CQC08001024932



### Features

- 10A switching capability
- 10kV impulse withstand voltage (between coil and contacts)
- Type 2 meets VDE 0700, 0631 reinforce insulation
- Highly efficient magnetic circuit for high sensitivity: 200mW
- Extremely small footprint utilizing PCB area
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.5 x 7.2 x 15.3) mm

Contact arrangement	1A
Contact resistance	100mΩ (at 1A 24VDC)
Contact material	AgSnO <sub>2</sub> , AgNi
Contact rating (Res. load)	7A 250VAC / 28VDC
Max. switching voltage	277VAC / 30VDC
Max. switching current	10A
Max. switching power	2770VA / 300W
Mechanical endurance	5 x 10 <sup>6</sup> ops
Electrical endurance	6 x 10 <sup>4</sup> ops (See approval reports for more details)

CHARACTERISTICS				
Insulation resistance		1000MΩ (at 500VDC)		
Dielectric		coil & contacts	4000VAC 1min	
		open contacts	1000VAC 1min	
Surge voltage (between coil & contacts)		10kV (1.2 x 50μs)		
Operate time (at nomi. volt.)		10ms max.		
Release time (at nomi. volt.)		10ms max.		
Shock resistance		Functional	98m/s <sup>2</sup>	
		Destructive	980m/s <sup>2</sup>	
Vibration resistance 1)		10Hz to 55Hz 1.5mm DA		
Humidity		98%, 40°C		
Ambient temperature		-40°C to 85°C		
Termination		PCB		
Unit weight		Approx. 3g		
Construction		Plastic sealed, Flux proofed		

Notes: 1) Index is not that of relay length direction. The characteristics of relay length direction is only 10Hz to 55Hz 1mm DA.

2) The data shown above are initial values.

COIL		
Coil power	200mW	

COIL DATA at 23°C				
Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.18	3.90	45 x (1±10%)
5	3.75	0.25	6.50	125 x (1±10%)
6	4.50	0.30	7.80	180 x (1±10%)
9	6.75	0.45	11.7	405 x (1±10%)
12	9.00	0.60	15.6	720 x (1±10%)
18	13.5	0.90	23.4	1620 x (1±10%)
24	18.0	1.20	31.2	2880 x (1±10%)

### **SAFETY APPROVAL RATINGS**


	AgNi	10A 125VAC/250VAC at 85°C 10A 277VAC/30VDC at 85°C 7A 125VAC/250VAC at 105°C 7A 277VAC/30VDC at 105°C
UL/CUL	AgSnO <sub>2</sub>	10A 125VAC/250VAC at 85°C
		10A 277VAC/30VDC at 85°C 7A 125VAC/250VAC at 85°C
		7A 277VAC/30VDC at 85°C
		TV-3
VDE	AgNi	7A 250VAC/30VDC at 105°C
		10A 250VAC/30VDC at 85°C
	AgSnO <sub>2</sub>	7A 250VAC/30VDC at 85°C 10A 250VAC/30VDC at 85°C

**Notes:** Only some typical ratings are listed above. If more details are required, please contact us.



ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2010 Rev. 1.10

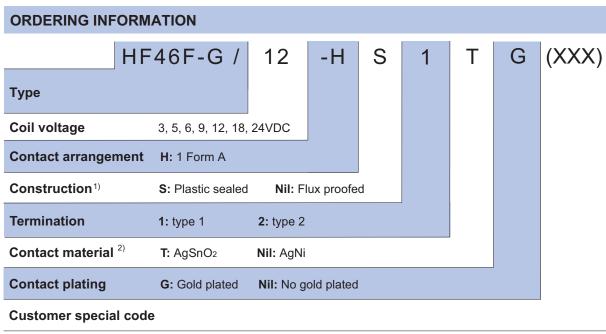

Notes: 1) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, plastic sealed type is recommended; please test the relay in real applications. If the ambience allows, flux proofed is preferentially recommended.

If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.


2) For the application of lamp (except LED), capacitive load, motor load or which can bring high inrush current when relay contacts connect instantly, AgSnO2 contact material is recommended on priority.


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

### **Outline Dimensions**


HF46F-G/\_\_-H\_1\_\_ (\_\_\_)














# Wiring Diagram (Bottom view)




#### **Outline Dimensions**


HF46F-G/\( \Bigcup - H \Bigcup 2 \Bigcup \) (\( \Bigcup \Bigcup \Bigcup \)







# PCB Layout (Bottom view)



Wiring Diagram (Bottom view)




Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq$ 1mm, tolerance should be  $\pm$ 0.2mm; outline dimension >1mm and  $\leq$ 5mm, tolerance should be  $\pm$ 0.3mm; outline dimension >5mm, tolerance should be  $\pm$ 0.4mm.

2) The tolerance without indicating for PCB layout is always  $\pm 0.1 \text{mm}$ .

### **CHARACTERISTIC CURVES**

#### **ENDURANCE CURVE**



### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.